
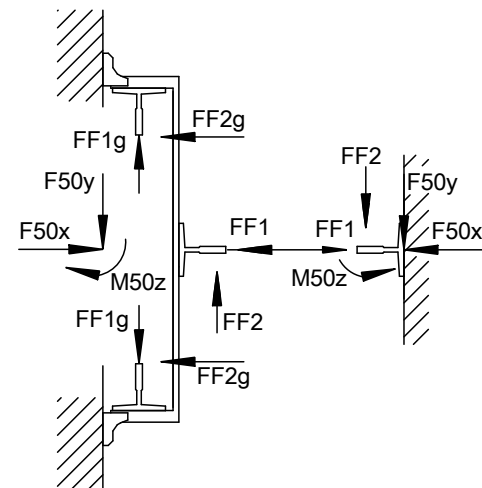


[illegible]

VARIANTY ULOŽENÍ MONTÁŽNÍHO NOSNÍKU

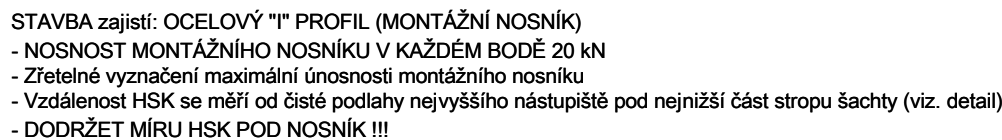

Maximální síly působící na
podlahu prohlubně

- 9 - při najetí klece na nárazník
- 10 - při najetí protiváhy na nárazník
- 11 - pod vodítkem klece
- 12 - pod vodítkem klece
- 13 - pod vodítkem protiváhy
- 14 - pod vodítkem protiváhy

Technical drawing of a rectangular structure, likely a floor plan or cross-section, showing dimensions and force points.

Dimensions:

- Overall width: 1900 (BS=1900)
- Overall height: 2630 (TS=2630)
- Internal width: 1324
- Internal height: 1315 (TKSW=1315)
- Top horizontal segments: 280, 786, 834
- Bottom horizontal segments: 280, 786, 834
- Left vertical segments: 768, 547, 547, 768
- Right vertical segments: 1315, 1315

Force Points and Labels:

- F13:** Located at the top left corner of the internal area.
- F10:** Located at the top left corner of the internal area, below F13.
- F12:** Located at the top left corner of the internal area, to the right of F10.
- F9:** Located at the top left corner of the internal area, to the right of F12.
- F10:** Located at the top left corner of the internal area, below F12.
- F14:** Located at the bottom left corner of the internal area.
- F9:** Located at the top right corner of the internal area.
- F11:** Located at the top right corner of the internal area, to the right of F9.

Other Labels:

- Vstupý : 0** (Top center)
- Vstupý : -1, 2** (Bottom center)
- SG=280** (Top left)
- TS=2630** (Right side)
- TKSW=1315** (Right side)
- BS=1900** (Bottom center)

ZOBRAZOVANÉ STAVEBNÍ KONSTRUKCE
JSOU POUZE SCHÉMATICKÉ.
STAVEBNÍ VÝKRESY VIZ Č. VÝKRESU 101-105

[illegible]