




Nouzové svítidlo

LED emergency luminaire for antipanic lighting with min. 0,5 lux acc. to EN 1838; high performance (HP) version enables wider luminaire spacing and applications with higher illuminances (e.g. 2 lux); 2 high power LEDs, neutral white 4,000 K; lens of polycarbonate; optimum thermal management via heat sink; Ceiling surface-mounted luminaire; Screw mounting of the gear tray, tool-free quick mounting of the cover; Cover made of die-cast aluminum, powder-coated white similar to RAL 9016; Gear tray made of galvanized sheet steel; Luminaire with local battery supply for 1 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; non-maintained and maintained mode settable via jumper and NFC interface, Maintained mode: +5°C to +25°C, non-maintained mode: +5°C to +30°C; Voltage supply: 220 - 240 V AC; Protection type IP40; SC1; Luminaire wired with halogen-free leads and contains no silicone; Plug-in terminals for through-wiring up to 2.5 mm²; Impact strength: IK07; Room height 2.2 to 10 m; Dimensions: 146 x 146 x 48 mm; weight: 0.87 kg;




ZS_RES_F_PRO_MSC_IP40_ExD_ANT_HP_WH.jpg

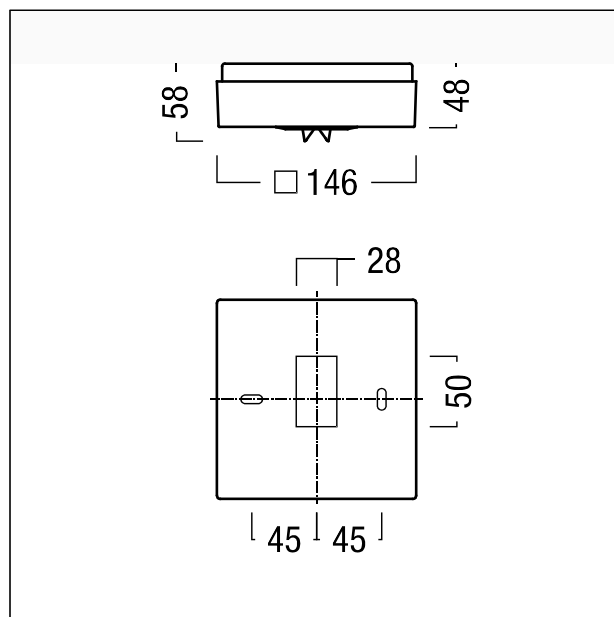

ZS_RES_M_PRO_MSC_IP40_HP.wmf

Křivka svítivosti

STD – standard

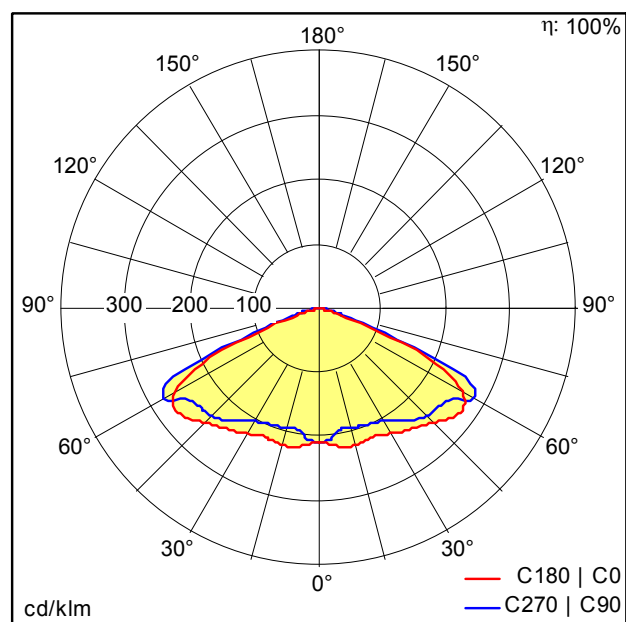

D39163AA_RESCLITE_PRO_MSC_ANT_HP_E1D_WH.Idt

- Světelný zdroj: LED
- Světelný tok*: 370 lm
- Světelný výkon svítidel*: 45 lm/W
- Předřadník: 1 x 89800524 EM TR EM powerLED NTx 102 DIM 5W ZUM
- Střední dimenzovaná životnost*: 50000h při/u 25°C
- Příkon svítidla*: 8,2 W Lambda = 0,84
- Příkon v pohotovostním režimu*: 1,2 W
- Napájení: 2,27 W
- Vyměření doby provozu: 1 h

Hodnoty označené * představují stanovené rozměrové hodnoty. Výkon a světelný tok podléhají zpočátku toleranci až do +/- 10 %. Tolerance barevné teploty: % K Pokud není uvedeno jinak, platí hodnoty pro okolní teplotu 25°C.

