

LED Escape sign luminaire; Luminaire with local battery supply for 1 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED; wall mounted; housing made of polycarbonate in injection moulded white finish; LED control gear with mechanical and optical addressing and integral maintenance function. Luminaire easy to install. Zero maintenance thanks to LED technology; service life of 50,000 h at constant luminous flux. Screw terminals 2.5 mm<sup>2</sup>, through-wiring possible for 1.5 mm<sup>2</sup>. Power supply: 220/240 V AC. Total power: 4.5 W; degree of protection: IP42, class of protection: SC2; non-maintained and maintained mode possible, Maintained mode: +5°C to +30°C, Non-maintained mode: +5°C to +30°C; dimensions of luminaire including escape sign: 227 x 130 x 27 mm; weight: 0.35 kg; Luminaire wired with halogen-free leads; please order escape sign separately


Příslušenství: PURESIGN 150 AW/EW SP-1L

22168695

Escape sign for PURESIGN 150 AW/EW with aluminium surround in powder-coated silver-look finish, designed for fitting without tools onto the PURESIGN/COMSIGN 150 housing. Integral low power LEDs provide uniform backlighting of pictogram with a luminance of > 500 cd/m<sup>2</sup> in the white region; pictogram applied by digital printing to the transparent polycarbonate panel. Arrow: left arrow. Recognition distance: EN-30 m; dimensions: 310 x 20 x 160 mm, weight: 0.72 kg.




ZS\_ONL\_F\_PUR\_150\_AW\_EW\_RZ-L.jpg

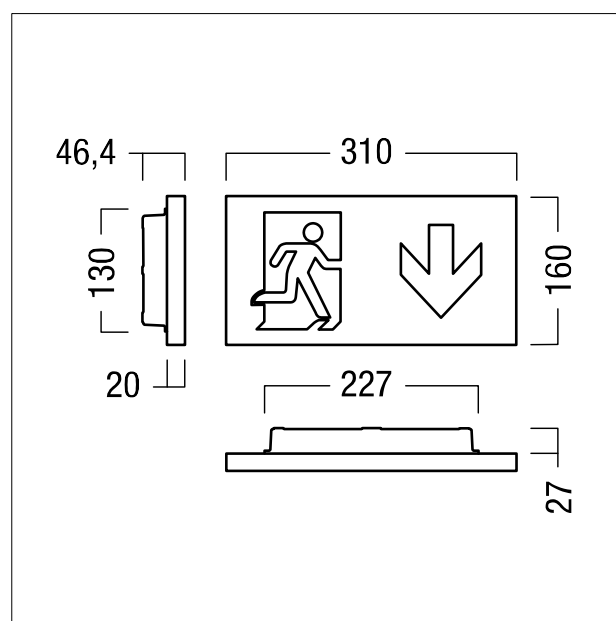

ZS\_ONL\_M\_PURE\_150\_AW\_Nx\_incl\_Rx.wmf

## Křivka svítivosti

## STD – standard

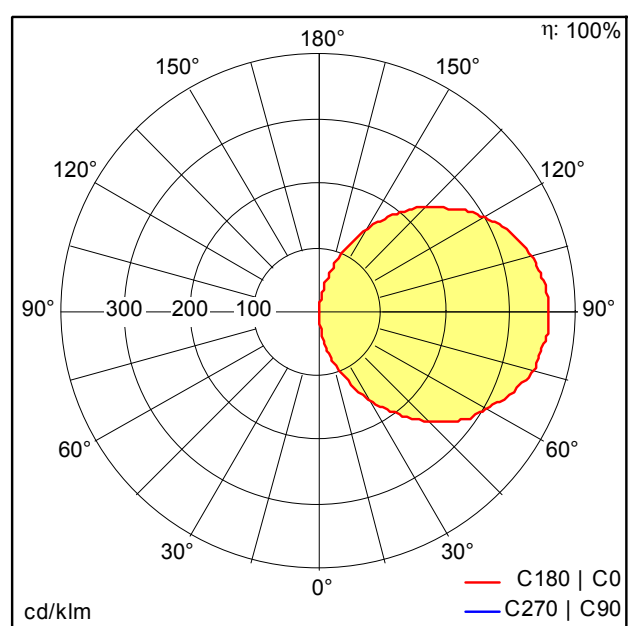

D31337AA\_NE1\_NT1.ltd

- Světelný zdroj: LED
- Světelný tok\*: 45 lm
- Světelný výkon svítidel\*: 10 lm/W
- Předřadník: 1 x 89800157 EM Power1 LED NTx L1 140x30x21
- Barevná tolerance v místě (MacAdam)\*: 4
- Střední dimenzovaná životnost\*: 50000h L80 při/u 25°C
- Příkon svítidla\*: 4,5 W Lambda = 0,4
- Příkon v pohotovostním režimu\*: 1,1 W
- Napájení: 1,1 W
- Vyměření doby provozu: 1 h

Hodnoty označené \* představují stanovené rozměrové hodnoty. Výkon a světelný tok podléhají zpočátku toleranci až do +/- 10 %. Tolerance barevné teploty: % K Pokud není uvedeno jinak, platí hodnoty pro okolní teplotu 25°C.